

Assembly Instructions for Somerset, Samson, Avon, Kansas and Cleveland Beds (All Sizes) Single Size Kit B Double Size Kit A Instructions: 2/Ranch (Version AUG2024)

Assembly Instructions
IMPORTANT – READ CAREFULLY –
RETAIN FOR FUTURE REFERENCE

IMPORTANT: DO NOT DISPOSE of the packaging until you are satisfied with your purchase.. Please keep all cardboard until fully satisfied.



Win £100

Announcing Our Bed Installation Video Competition!

If you've recently purchased one of our solid pine bunk beds and documented your installation journey, we want to see it! Share your installation video with us, and you could win a fantastic prize of £100.

Scan this QR code for more details





Extended Warranty

Available Direct From the Manufacturer

STRICTLY
BEDS BUNKS

UK Bed Manufacturers
Living The Dream

Extend the warranty from 12 months to 36 months for a one-off payment from little as

£19.99 (inc VAT)




You don't have to have purchased the bed directly from us, so long as you purchase this warranty within 30 days of delivery you will be covered.

This warranty extension is only available on Strictly Beds and Bunks products. Scan the QR barcode for more details

TOP TIPS - TOP TIPS

Read before you start assembly



Locating the Dowel Rods

To keep the bed from rattling all the dowel holes have been slightly mis-drilled by a couple of mm. When you push parts together the dowels will straighten and pull together to ensure a tight fit. Whenever you locate a dowel on the hole NEVER push it all the way in, leave it so it is loose and can be aligned with the second locating



Push them all the way in and they will not line up.

GLUE SACHET INCLUDED

We have included a sachet of glue. THIS IS NOT TO BE USED with the dowel rods.





Open the sachet and empty into a plastic container. Whenever you connect a confirmat bolt (D) or a connector bolt (B) into a barrel bolt (c) dip the end of the bolt in the wood glue and screw in as normal. This will act as a lock tight and prevent the bolt from working loose.



Clean out the Pre-drilled Holes


You have brought a solid pine product. During the drilling process there may be sawdust still in the holes.





Applying a Finish to the Beds

The bed can be used in a natural form. However if you are applying a stain or finish we advise that you build the bed first. When you are happy with your purchase then put a sheet under the product and






NOTE: we are unable to accept the return, under any circumstance once a finish has been applied. By painting the bed you have deemed to accept the quality.




Corner Posts

Make sure the WHITE Mark is facing upwards when laid on the floor Headboard Facias-These are colour coded Please position as follows: RED - At the top WHITE - In the middle BLUE - At the bottom



Fixing List

Note: The quantitities below are the correct amount to complete the assembly. In some cases more fittings may be suppplied than required. These are universal instruction so some fixings have different QTY's depending on size, ie single or double sizes.

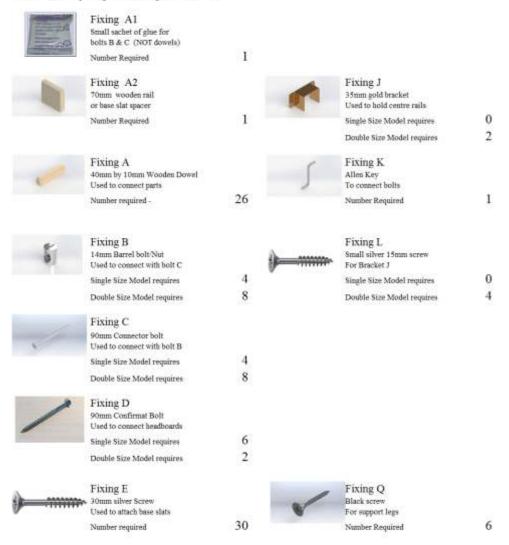

In the rare event you are short of fixings you can order free of charge at www.strictlyhelpdesk.co.uk

CUSTOMER CARE

We have checked all parts to ensure they are free of damage. However timber is a natural, living product. Occasionally timber can still be adjusting to humidity, for this reason a crack or stretch mark may appear after the product has been packaged.



Strictly Beds and Bunks however have a FREE PARTS REQUEST service in this unlikely event. You need to order a part please go to

Aftersales Portal - www.strictlyaftersales.co.uk Email Assistance: help@strictlybedsandbunks.co.uk



SAFETY NOTICE: WOODEN FLOORS

This bed uses support legs to ensure heavy duty use. If you are locating this bed on a laminate or wooden floor the bed may move/slip when in use. This movement may dislodge the support legs. You must therefore attach non-slip pads under each corner post to prevent this movement. These also protect your floor. You can scan this QR Code for details on how to purchase these.

Bed Identifier

These instructions are for Four Beds, there is only a slight assembly difference for these models



Somerset Range

Headboard Corner Posts SL LEFT SR (RIGHT) Foot Board Corner Post BL (LEFT) BR (RIGHT) (codes found on the bottom of each post)



Cleveland & Thor Range

Headboard Corner Posts TL LEFT TR (RIGHT)
Foot Board Corner Post BL (LEFT) BR (RIGHT)
(codes found on the bottom of each post)



Samson Range

Headboard Corner Posts TL LEFT TR (RIGHT) Foot Board Corner Post SBL (LEFT) SBR (RIGHT) (codes found on the bottom of each post)



Avon & Kansas Range

Headboard Corner Posts BL LEFT BR (RIGHT)
Foot Board Corner Post BL (LEFT) BR (RIGHT)
(codes found on the bottom of each post)



SAFETY NOTICE: WOODEN FLOORS

This bed uses support legs to ensure heavy duty use. If you are locating this bed on a laminate or wooden floor the bed may move/slip when in use. This movement may dislodge the support legs. You must therefore attach non-slip pads under each corner post to prevent this movement. These also protect your floor. You can scan this QR Code for details on how to purchase these.

Consult Box Contents list for QTY



Need Help Assembling This Product?

We have some videos online that may help you. Please scan this barcode using your phone or visit www.strictlybedsandbunks.co.uk/assemblyhelp

How to identify your parts and fixings

All our products have four attachment methods. These are colour coded, at the end of each part you will find a marker pen marking either RED, WHITE or BLUE (two types)




RED MARKING/FIXINGS

The part will have a red marker pen marking on the end.

Hole / Bolt configuration: One large dowel hole - Place for large dowel One small hole - Place for large 90cm confirmation bolt D

Areas this method is used: Top front and back guard rails and top headboard facia




WHITE MARKING/FIXINGS

The part will have a white chalk marking on the end.

Hole / Bolt configuration: TWO large dowel holes - Place for large dowel


Areas this method is used:
Bottom front and back guard rails and centre headboard facia



BLUE MARKING/FIXINGS **SINGLE BEDS (2ft 6 or 3ft)**

The part will have a blue marker pen marking on the end.

Hole / Bolt configuration: TWO large dowel holes - Place for large dowel One small centre hole - Place for large 90mm connector bolt D




BLUE MARKING/FIXINGS

** 4ft, 4ft 6, 5ft or 6ft size ONLY**

The part will have a blue marker pen marking on the end. Hole / Bolt configuration:

TWO large dowel holes - Place for large dowel
One small centre hole - Place for large 90mm connector bolt C
Facing access hole - Place for barrel bolt B bolt



SIDE RAIL MARKING/FIXINGS


The part will have a blue marker pen marking on the end.

Hole / Bolt configuration:

TWO large dowel holes - Place for large dowel
One small centre hole - Place for large 90mm connector
bolt C

Facing access hole - Place for barrel bolt B

Somerset Model, Build the Head Board



First Select the two headboard posts, See page 4 for corner post codes (post codes ending in L are Left side, ending in R are right side) Lay each post on the carpet, these posts will have a **white chalk marking, these MUST be facing** you and at the top when laying on the carpet.

Position four Headboard Facias as shown in PIC 1. Place in this order from the top of the corner post, these will have colour codes at each end.

Part 15 - MARKED RED

Part 14 - MARKED WHITE

Part 14 - MARKED WHITE

Part 13 - MARKED BLUE



Now push the dowel rods in either side of these headboard facias. It is IMPORTANT, do not push these all the way in. Have them loose so they can angle when you attach. They will align when you attach to the post.





Now, remember to ensure **the WHITE CHALK markings are facing upwards** locate the dowel rods to each corner post. Again, do not push in the dowels all the way. Once in place connect the head board facias to the corner post, you will again see the dowels align as you tighten. Then fix using the bolts below.

Part 15 - MARKED RED (see page 5, PIC 1 for fixings)

Part 14 - MARKED WHITE (see page 5, PIC 2 for fixings)

Part 14 - MARKED WHITE (see page 5, PIC 2 for fixings)

Part 13 - MARKED BLUE (see page 5, PIC 3 for fixings)

**REMEMBER, 2ft 6 & 3ft single sizes use different fixings to all other sizes. SEE PAGE 5)



CLEVELAND/THOR/SAMSON BED FRAME

This model is the same as above except it has one less part 14 on the headboard

Part 15 - MARKED RED (see page 5, PIC 1 for fixings)

Part 14 - MARKED WHITE (see page 5, PIC 2 for fixings)

Part 13 - MARKED BLUE (see page 5, PIC 3 for fixings)

**REMEMBER, 2ft 6 & 3ft single sizes use different fixings to all other sizes. SEE PAGE 5)



AVON / KANSAS MODELS

This model only has one headboard facia, Part 13.

Part 13 - MARKED BLUE (see page 3, PIC 3 for fixings)

**REMEMBER, 2ft 6 & 3ft single sizes use different fixing

**REMEMBER, 2ft 6 & 3ft single sizes use different fixings to all other sizes. SEE PAGE 5)

Now We Build the Footboard



Each corner post will have a white chalk marking, lay the post down and have the markings facing you, at the top. BL goes to the left, BR goes to the right.

Part 13 Blue (see page 5, FIG 3 or 2 for fixings)

NOTE: THE SAMSON - Corner Post SBL to the left, SBR to the right side. This model has an EXTRA PART 14 (WHITE) to the footboard

Attach the two side rails







Firstly ensure there is no sawdust or debris in the access holes. Using a bolt push through to clear. Now insert the dowel rods at all ends, do not push all the way in.

Make sure the WHITE MARKINGS on each headboard are facing inwards. Now start with the headboard and connect each side rail to each corner post

Place the barrel bolt within the round access hole on the side rail. Now dip bolt B into the glue and push through to connect to the barrel bolt. This side rail is designed not too move so the fixing is tight. Then locate the footboard, again ensure the WHITE MARKINGS are facing inwards and connect. (See page 5, FIG 5 for fixings

Attach the side rail support legs

(The Kansas Has no Support Legs)



It is important this leg is attached as it supports the side rail. Measure a half way point on the side rail. Place the support leg under the side rail from the outside. Using two black screws attach from the inside of the side rail. Note there is no access hole as the screws are self threading

The centre leg will hover slightly off the floor, when the bed is in use it will move down and support the bed. This is to protect the leg if the bed moves.



If you have ordered a guest bed simply do not attach the side rail support leg to the front but place two under the rear side rail.

Attach The Centre Rail (Double/Kingsize Beds ONLY)





From the inside of the bed we need to attach metal brackets, one either end. These are fixed using the small screws (L), these are fixed to bottom headboard facia. Using a tape mark a centre line from each corner post, then measure and mark **55mm** from the top of the BLUE Facia(13). Now position the top of the bracket (J) just below this mark, attach with the small screw (L). The centre rail must be fit flush under the base slats

Attach the centre rail support leg



The centre leg is located under the centre rail, in the centre. Simply measure to the centre of the bed and locate under the centre rail. Using two black screws attach from the side.



It is IMPORTANT that this is positioned correctly and remains in place while the bed is being used, failure to fix will weaken the bed. This part is manufactured using recycled timber as the component is out of sight. The centre leg will hover slightly off the floor, when the bed is in use it will move down and support the bed. This is to protect the leg if the bed moves.



We Now need to attach the base slats.

You will have twelve extra wide base slats. Push the first slat tight with the footboard corner posts, then using the base slat spacer block evenly space out the remaining base slats. DO NOT SCREW IN PLACE YET.

Now push the slats flush to the left hand side rail and screw in (do not screw the right hand side yet). Now go to the right hand side and start with the slat near the centre. Push the side rail in so the slat is flush, then fix using the screw. This aligns the side rail. Now fix the remaining base slats.



IMPORTANT TIP.

The instruction above has told you to attach one side first, then PUSH THE OPPOSITE siderail flush to the base slat. If you do not follow this instruction the base slats WILL NOT BE FLUSH and you will think they are too short and try to order parts.



Push Siderail until flush